

ALABAMA A&M UNIVERSITY MORRISON FINE ARTS BUILDING INTERIOR FINISHES UPGRADES



VICINITY MAP (NTS)

PROJECT TEAM	
OWNER	ARCHITECTURE / INTERIOR DESIGN
ALABAMA A&M UNIVERSITY	STUDIO 2H DESIGN, LLC
490 MERIDIAN STREET N	1721 4TH AVENUE NORTH, SUITE 101
HUNTSVILLE, ALABAMA 35811-7500	BIRMINGHAM, ALABAMA 35203

DRAWING INDEX NEW WORK

SHEET NO.	SHEET TITLE	Current Revision Description	Current Revision Date
T1.0	COVER SHEET		
A2.1 N	FIRST FLOOR PLAN NORTH		
A2.2 N	SECOND FLOOR PLAN NORTH		
A2.3 S	FIRST & SECOND FLOOR PLAN SOUTH		
A4.1	PHOTOS		

ABBREVIATIONS

ABV	ABOVE	FA	FIRE ALARM	PL	PLATE
ACT	ACOUSTICAL TILE	FB	FLOOR BOX	PLAM	PLASTIC LAMINATE
AD	AREA DRAIN	FCO	FLOOR CLEAN OUT	PLBG	PLUMBING
ADJ	ADJUSTABLE	FD	FLOOR DRAIN	PLNS	PLANS
AFF	ABOVE FINISHED FLOOR	FDN	FOUNDATION	PMS	PANEL(S)
ALUM	ALUMINUM	FE	FIRE EXTINGUISHER	PLYWD	PLYWOOD
APPRX	APPROXIMATE	FEC	FIRE EXTINGUISHER CABINET	PRTN	PARTITION
ARCH	ARCHITECTURAL	FFE	FINISHED FLOOR ELEVATION	PTD	PRESSURE TREATED
ARND	AROUND	FFL	FINISHED FLOOR LEVEL	PTD	PAINTED
ASPH	ASPHALT	FIN	FINISH	R	RISER
BKGS	BLOCKING	FLR	FLOOR	RAD	RADIUS
BM	BEAM	FLRG	FLOORING	RD	ROOF DRAIN
B.O.	BOTTOM OF	FLASH	FLASHING	REF	REFERENCE
BOT	BOTTOM	FLUORESC	FLUORESCENT	REG	REGISTER
BRG	BEARING	FH	FIRE HYDRANT	RGSTR	REGISTER
BC	BACK OF CURB	FOC	FACE OF CONCRETE	REINF	REINFORCED
BD	BOARD	FOSF	FACE OF STORE FRONT	REIG	RETAINING
BFF	BELOW FINISHED FLOOR	FOP	FACE OF FINISH	REQD	REQUIRED
BVND	BEYOND	FOM	FACE OF MASONRY	REOS	REQUIREMENTS
CAB	CABINET	FOS	FACE OF STUDS	RH	RIGHT HAND
CB	CATCH BASIN	FRAMG	FRAMING	RND	ROUND
CER	CERAMIC	FRT	FIRE TREATED	RO	ROUGH OPENING
CFM	CUBIC FEET PER MINUTE	FT	FULL SIZE	RL	RAIN LEADER
CH	CEILING HEIGHT	FT	FULLY TEMPERED	SAB	SOUND ATTENUATION BLANKET
CHK	COAT HOOK	FTG	FOOTING	SC	SOLID CORE
CHR	CHILLED WATER RETURN	FURR	FURRING	SFC	SURFACE
CHW	CHILLED WATER SUPPLY	F.V.	FIELD VERIFY	SHLF	SHELF
CI	CAST IRON	GA	GALVE	SHT	SHEET
CJ	CONTROL JOINT	GALV	GALVANIZED	SHB	SIMILAR
CLNG	CEILING	GB	GYPSUM BOARD	SUNT	SEALANT
CLOS	CLOSET	GLS	GLASS	SMC	SHAMOSE CONNECTION
CLR	CLEAR	GVP	GYPSUM	SS	SPECIFICATION
CLNR	CLEAR	HC	HANDICAP	SS	SOLID SURFACE
CNTR	COUNTER	HNDW	HOLLOW METAL	STD	STANDARD
CO	CLEANOUT	HM	HOUR	STL	STEEL
COL	COLUMN	HR	HOUR	STN STL	STAINLESS STEEL
CONC	CONCRETE	HW	HOT WATER	STOR	STORAGE
CONN	CONNECTION	HWP	HOT WATER PUMP	STRUC	STRUCTURE
CONSTR	CONSTRUCTION	HWR	HOT WATER RETURN	STRUCTL	STRUCTURAL
CONT	CONTINUOUS	HWS	HOT WATER SUPPLY	SUSP	SUSPENDED
COORD	COORDINATE	ID	INSIDE DIAMETER	TC	TOP OF CURB
CORR	CORRIDOR	IF	INSIDE FACE	TEL	TELEPHONE
CPT	CARPET	INCL	INCLUDE	TEMP	TEMPORARY
DBL	DOUBLE	INSUL	INSULATION	TFF	TOP OF FINISH FLOOR
DF	DRINKING FOUNTAIN	INT	INTERIOR	T&G	TONGUE & GROOVE
DTL	DETAIL	JAN	JANITOR	THK	THICK
DIA	DIAMETER	JST	JOIST	THLD	THRESHOLD
DIM	DIMENSION	JNT / JT	JOINT	TLT	TOILET
DISP	DISPENSER	LAB	LABORATORY	T.O.	TOP OF
DN	DOWN	LOC	LOCATION	TOBM	TOP OF BEAM
DR(S)	DOOR(S)	LP	LIGHT POLE	TRD	TREAD
DS	DOWNSPOUT	LT	LIGHT	TS	TUBE STEEL
DWG	DRAWING	MACH	MACHINE	TSTAT	THERMOSTAT
EA	EACH	MATL	MATERIAL	TOS	TOP OF SLAB or STEEL
EF	EXHAUST FAN	MAX	MAXIMUM	TOW	TOP OF WALL
EJ	EXPANSION JOINT	MDF	MEDIUM DENSITY FIBERBOARD	TYP	TYPICAL
EL	ELEVATION	MECH	MECHANICAL	UNO	UNLESS NOTED OTHERWISE
ELEC	ELECTRICAL	MEMB	MEMBRANE	US	UNDERSIDE
ENCL	ENCLOSURE	MTL	METAL	VCT	VINYL COMPOSITION TILE
ENTR	ENTRANCE	MFR	MANUFACTURER	VERT	VERTICAL
EP	ELECTRICAL PANELBOARD	MN	MANHOLE	VEST	VESTIBULE
EQ	EQUAL	MIN	MINIMUM	VST	VENT STACK
EQUIP	EQUIPMENT	MIR	MIRROR	VSTR	VENT STACK THRU ROOF
EXIST'G	EXISTING	MS	METAL STUD	VTR	VENT THRU ROOF
EPV	EXISTING PIPE VENT	MTD	MOUNTED	W/	WITH
ERD	EXISTING ROOF DRAIN	MUL	MULLION	WC	WATER CLOSET
EWC	ELECTRIC WATER COOLER	MW	MILLWORK	WD	WOOD
EXPD	EXPOSED	N	NORTH	WIDW	WINDOW
EXPN	EXPANSION	N/A	NOT APPLICABLE	WF	WATER FOUNTAIN
EXT	EXTERIOR	NIC	NOT IN CONTRACT	WH	WALL HYDRANT (EXTERIOR)
		NOM	NOMINAL	W/O	WITHOUT
		NTS	NOT TO SCALE	WP	WATERPROOF
				WR	WATER RESISTANT
				WWF	WELDED WIRE FABRIC
		OC	ON CENTER		
		OCH	ON CENTER HORIZONTALLY		
		OCV	ON CENTER VERTICALLY		
		OD	OUTSIDE DIAMETER		
		OF	OVERFLOW		
		OH	OPPOSITE HAND		

PROJECT TITLE
ALABAMA A&M UNIVERSITY
FINE ARTS BUILDING
INTERIOR FINISHES
UPGRADES

4900 MERIDIAN STREET N
MORRISON BUILDING
HUNTSVILLE, AL 35811

STAMP



STUDIO 2H DESIGN, LLC
1721 4TH AVENUE NORTH,
SUITE 101
BIRMINGHAM, AL 35203
OFFICE: 205-264-9988
FAX: 205-264-9992
WWW.STUDIO2HD.COM

NOT FOR CONSTRUCTION

RELEASED FOR CONSTRUCTION

DATE: 03/10/2020

DRAWN BY: CBH

REVIEWED BY: CBH

REUSE OF DOCUMENTS
THIS DOCUMENT, THE IDEAS
AND DESIGNS INCORPORATED
HEREIN, IS AN INSTRUMENT OF
STUDIO 2H DESIGN, LLC AND MUST
NOT BE USED IN WHOLE OR IN PART
FOR ANY OTHER PROJECT WITHOUT
THE WRITTEN AUTHORIZATION OF
STUDIO 2H DESIGN, LLC
NOLANDA HATCHER & CREIG HOSKINS

REVISIONS		
Revision	Date	Description

SHEET TITLE
COVER SHEET

DRAWING NUMBER
T1.0
PROJECT NUMBER
202002

- 1 REMOVE EXISTING CARPET, RUBBER BASE AND ADHESIVE AS REQUIRED PER MFR RECOMMENDATION FOR INSTALLATION OF NEW CARPET AND BASE.
- 2 REMOVE EXISTING VCT FLOORING, RUBBER BASE AND ADHESIVE AS REQUIRED PER MFR RECOMMENDATION FOR INSTALLATION OF NEW VCT FLOORING AND RUBBER BASE. MAINTAIN A 12" SAMPLE OF THE EXISTING BASE TO BE USED AS THE CONTROL SAMPLE FOR THE NEW BASE.
- 3 SCRAPE, FILL HOLE AND PATCH CMU WALL AS REQUIRED TO RECEIVE NEW PAINT FINISH.
- 4 SAND CMU WALL AS REQUIRED TO RECEIVE NEW PAINT FINISH.
- 5 REPLACE DAMAGED PLASTIC LAMINATE COUNTERTOP
- 6 CLEAN STAINLESS STEEL SINKS AND REMOVE PAINT FROM BASE CABINETS
- 7 STRIP WAX AND REFINISH FLOOR. PAINT WALLS.
- 8 PROVIDE NEW PAINTED WALLS, NEW CARPET AND BASE.
- 9 PROVIDE NEW PAINTED WALLS, NEW VCT FLOORING AND BASE.
- 10 PROVIDE NEW PAINTED WALLS
- 11 REMOVE EXISTING CARPET, RUBBER BASE AND ADHESIVE AS REQUIRED PER MFR RECOMMENDATION FOR INSTALLATION OF NEW CARPET AND BASE. PROVIDE NEW PAINTED WALLS, NEW CARPET FLOORING AND BASE. REFER TO ALTERNATE #1.
- 12 REMOVE EXISTING VCT FLOORING, RUBBER BASE AND ADHESIVE AS REQUIRED PER MFR RECOMMENDATION FOR INSTALLATION OF NEW VCT FLOORING AND RUBBER BASE. MAINTAIN A 12" SAMPLE OF THE EXISTING BASE TO BE USED AS THE CONTROL SAMPLE FOR THE NEW BASE. PROVIDE NEW PAINTED WALLS. REFER TO ALTERNATE #2.
- 13 REMOVE EXISTING CARPET, RUBBER BASE AND ADHESIVE AS REQUIRED PER MFR RECOMMENDATION FOR INSTALLATION OF NEW RUBBER FLOOR AND BASE. REMOVE EXISTING ACOUSTICAL WALL PANELS AS REQUIRED TO INSTALL NEW ACOUSTICAL WALL PANELS. REFER TO ALTERNATE #3.
- 14 REMOVE EXISTING LOOSE PLASTER AT CEILING. PREP TO RECEIVE GYPSUM JOINT COMPOUND, SAND, & REPAINT ENTIRE CEILING, WALL AND LOW WALL. MATCH EXISTING COLOR AND TEXTURE. PROTECT CEILING FIXTURES. REFER TO ALTERNATE #4.

1. PROTECT EXISTING CONDITIONS TO REMAIN, THE GC IS RESPONSIBLE FOR ANY DAMAGE CAUSED BY DEMOLITION, NEW WORK & CONSTRUCTION.
2. CONTRACTOR TO VISIT SITE TO DETERMINE WHAT EXISTING CONDITIONS AFFECT WORK, AND INCLUDE NECESSARY WORK IN BID.
3. ALL WORK SHALL BE PERFORMED IN A SAFE AND ACCEPTABLE MANNER TO ALL AUTHORITIES HAVING JURISDICTION AND THE OWNER. THOROUGHLY CLEAN ADJACENT AREAS OF DUST, DIRT AND DEBRIS CAUSED BY WORK BEING PERFORMED.
4. JOB SAFETY IS NOT THE RESPONSIBILITY OF THE OWNER OR ARCHITECT, THE CONTRACTOR IS RESPONSIBLE FOR ALL CONSTRUCTION SITE AND BUILDING SAFETY.
5. CONTRACTOR TO PROTECT ALL EXISTING BUILDING STRUCTURES, FINISHES, AND EQUIPMENT FROM COLLECTING DUST AND DAMAGE DURING DEMOLITION.
7. CONTRACTOR TO REMOVE AND DISPOSE OF ALL TRASH AND DEBRIS FROM THE BUILDING AS A RESULT OF CONSTRUCTION.
8. REMOVE, REPLACE, PATCH, AND REPAIR MATERIALS AND SURFACES CUT OR DAMAGED DURING SELECTIVE DEMOLITION, BY METHODS, SIMILAR AND MATCHING MATERIALS.
9. ALL WALLS TO RECEIVE LEVEL 4 FINISH. FILL HOLES, PATCH/REPAIR/FILL HOLES AT ALL WALLS AS NEEDED TO MATCH ADJACENT FINISHES. PROTECT SWITCHES, DOOR ALARMS, THERMOSTATS, INDICATOR LIGHTS, VOICE/DATA OUTLETS, CALL BUTTONS, LIGHT FIXTURES, CAMERAS, FIRE ALARM DEVICES RECEPTACLES, ETC FROM PAINT SPLATTER/OVERSPRAY.
10. ALL DENTS, DAMAGE OR HOLES AT EXISTING DOOR FRAMES TO BE REPAIRED WITH BONDO STANDARD SMOOTH. PRIME BEFORE PAINTING.
11. ALL NEW VCT TO RECEIVE FOUR (4) COATS OF S.C. JOHNSON VECTRA FLOOR FINISH. NO OTHER FINISH SHALL BE ALLOWED. FINISH BY BUFFING IN ACCORDANCE WITH MANUFACTURER'S DIRECTIONS TO ACHIEVE A BURNISHED GLOSS APPEARANCE.
12. ALL PLASTIC LAMINATE INSTALLATION SHALL MATCH THE EXISTING WORK
13. ALL ART WORK ON THE EXISTING WALL THAT IS TO REMAIN SHALL BE PROTECTED FROM OVER SPRAY AND PAINT SPLATTERING
14. PROTECT EXISTING CONDITIONS TO REMAIN, THE GC IS RESPONSIBLE FOR ANY DAMAGE CAUSED BY DEMOLITION, NEW WORK & CONSTRUCTION.



STAMP



NOT FOR CONSTRUCTION ☐

RELEASED FOR CONSTRUCTION

DATE: 03/10/2020

DRAWN BY: CBH

REVIEWED BY: CBH

THIS DOCUMENT, THE IDEAS AND DESIGNS INCORPORATED HEREIN, IS AN INSTRUMENT OF STUDIO 2H DESIGN, LLC AND MUST NOT BE USED IN WHOLE OR IN PART, FOR ANY OTHER PROJECT WITHOUT THE WRITTEN AUTHORIZATION OF STUDIO 2H DESIGN, LLC
NOLANDA HATCHER & CREIG HOSKINS

[illegible]

SHEET TITLE

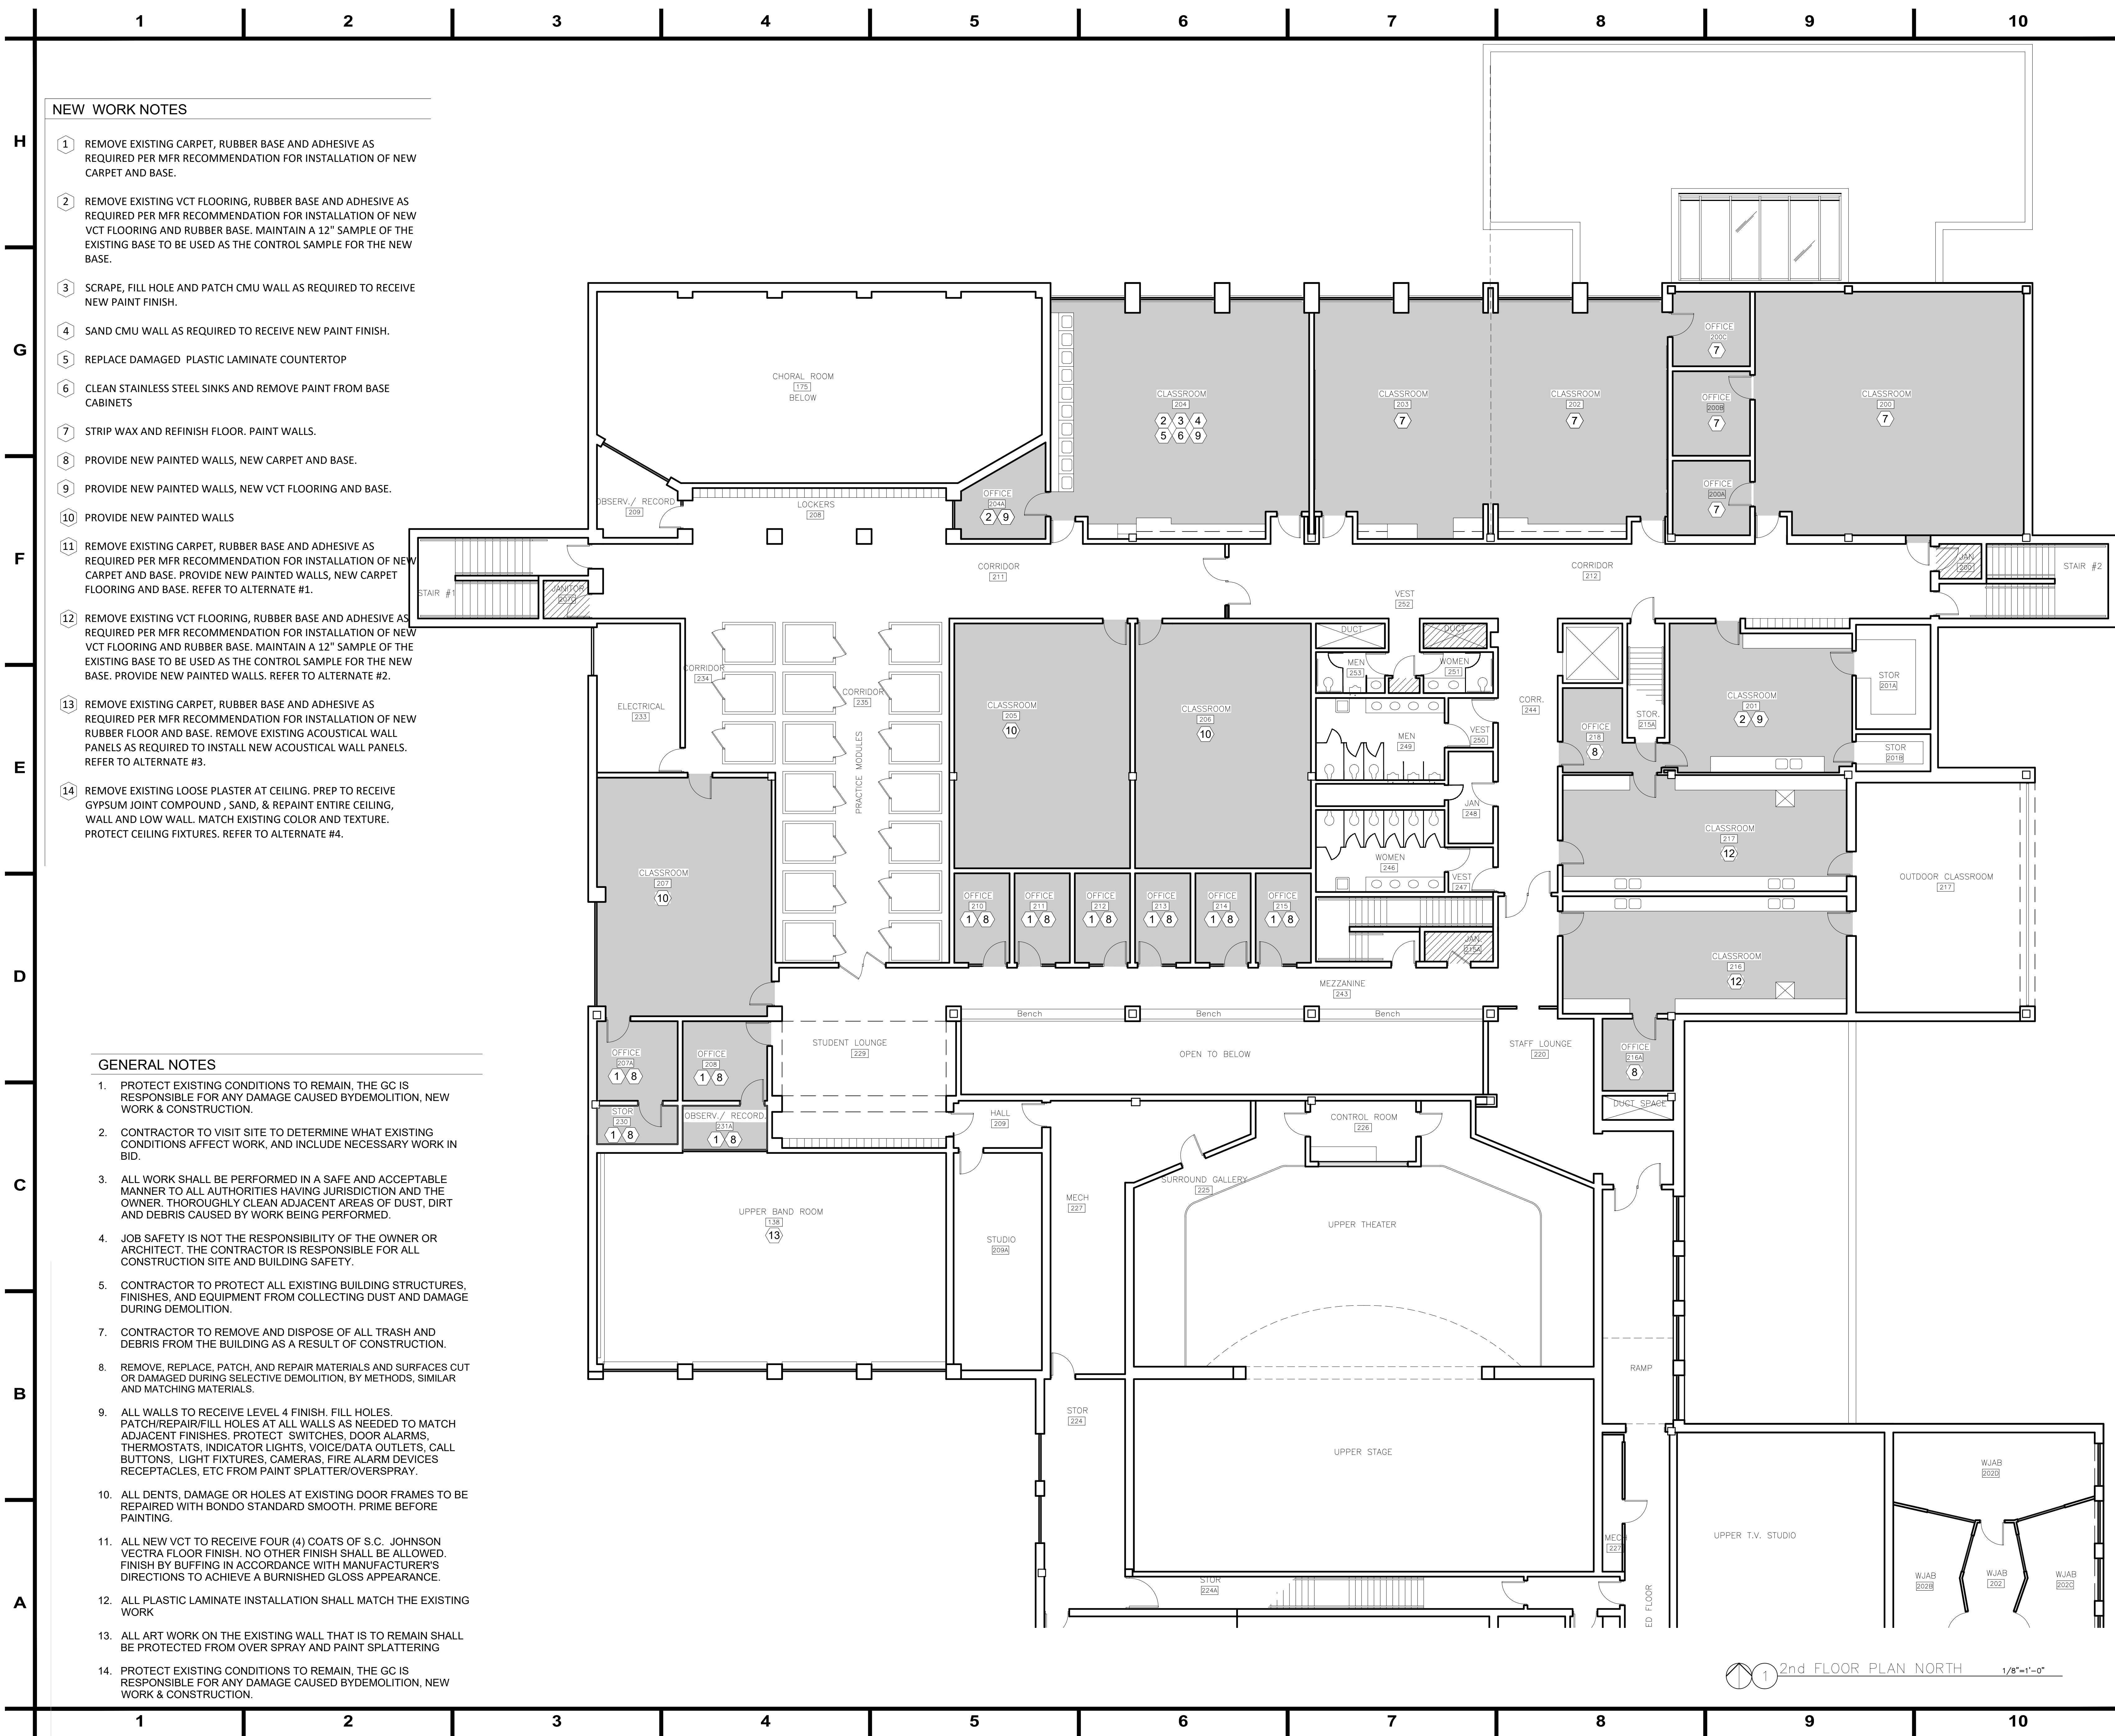
**FIRST FLOOR
PLAN NORTH**

DRAWING NUMBER

A2.1 NORTH

PROJECT NUMBER

202002



PROJECT TITLE
LABAMA A&M UNIVERSITY
FINE ARTS BUILDING
INTERIOR FINISHES
UPGRADES

4900 MERIDIAN STREET N
MORRISON BUILDING
HUNTSVILLE, AL 35811

STAMP



STUDIO 2H
DESIGN

1721 4TH AVENUE NORTH,
SUITE 101
BIRMINGHAM, AL 35203

OFFICE: 205-264-9988
FAX: 205-264-9992

STUDIO 2H DESIGN, LLC STUDIO2HD.COM

NOT FOR CONSTRUCTION ☐

RELEASED FOR CONSTRUCTION ■

DATE: 03/10/2020

DRAWN BY: CBH

REVIEWED BY: CBH

REUSE OF DOCUMENTS

THIS DOCUMENT, THE IDEAS
AND DESIGNS INCORPORATED
HEREIN, IS AN INSTRUMENT OF
STUDIO 2H DESIGN, LLC AND MUST
NOT BE USED IN WHOLE OR IN PART,
FOR ANY OTHER PROJECT WITHOUT
THE WRITTEN AUTHORIZATION OF
STUDIO 2H DESIGN, LLC
NOLANDA HATCHER & CREIG HOSKINS

[illegible]

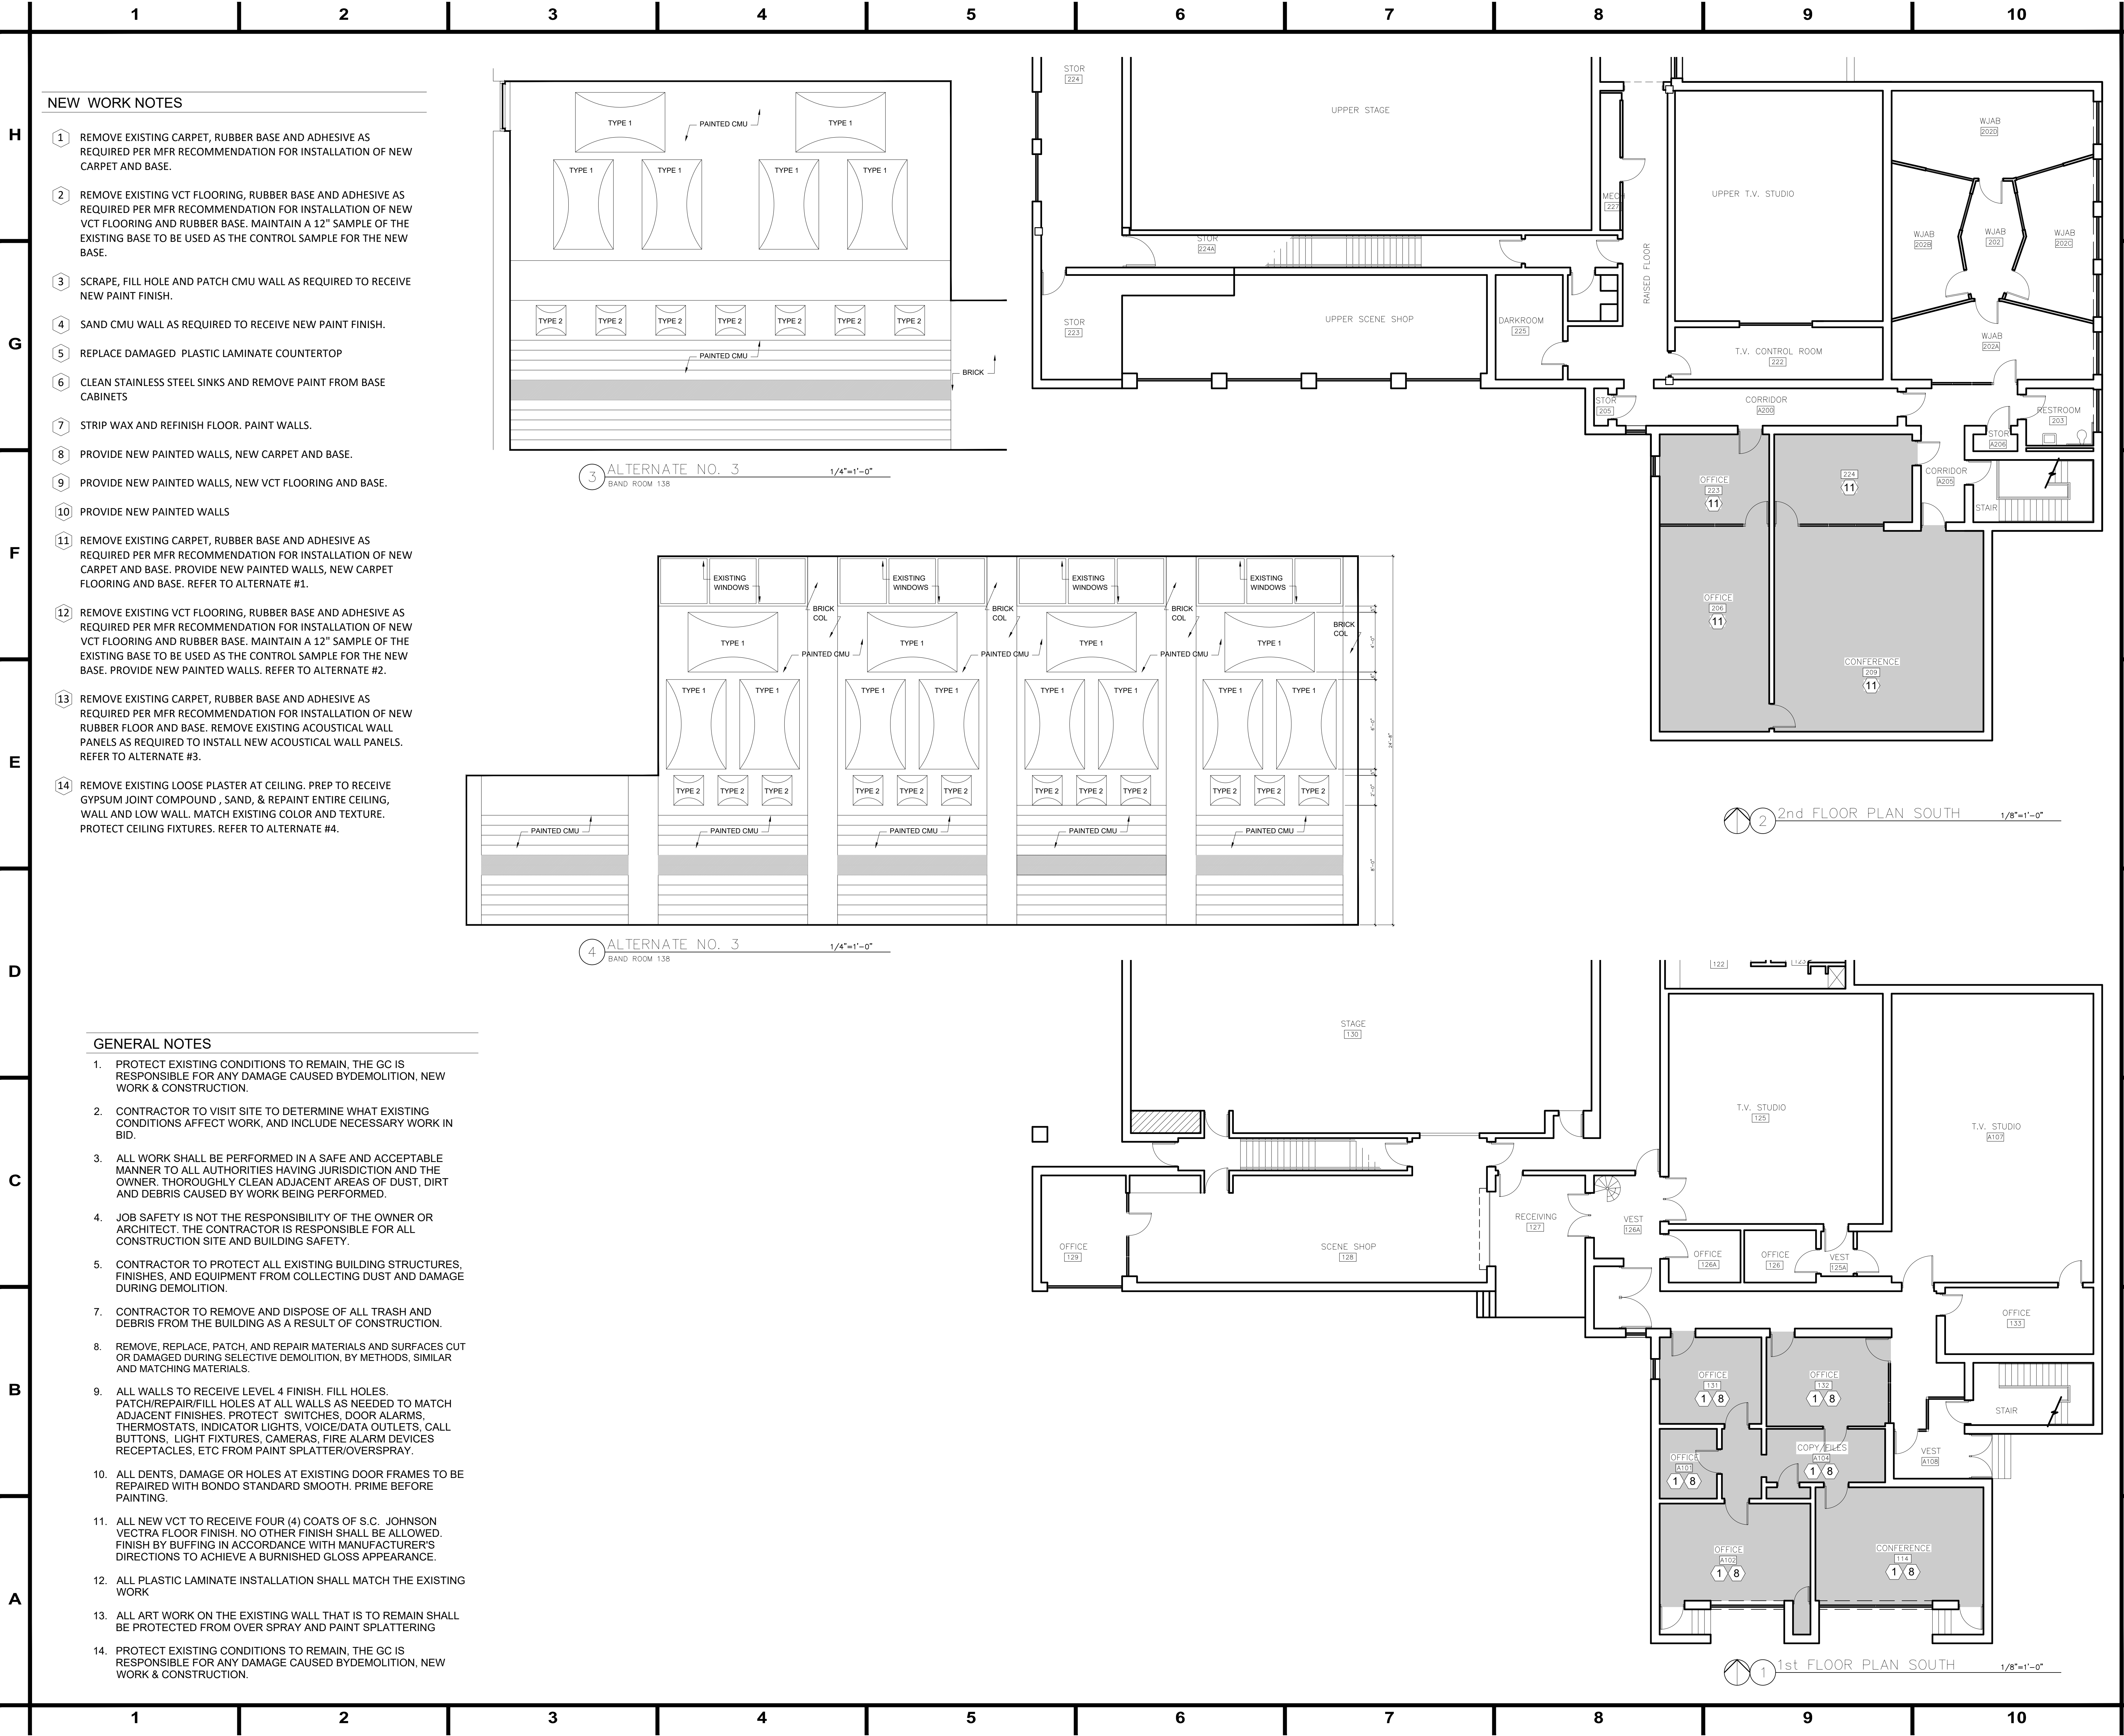
SHEET TITLE
SECOND FLOOR
PLAN NORTH

DRAWING NUMBER

A2.2 NORTH

PROJECT NUMBER

202002



PROJECT TITLE
ALABAMA A&M UNIVERSITY
FINE ARTS BUILDING
INTERIOR FINISHES
UPGRADES

4900 MERIDIAN STREET N
MORRISON BUILDING
HUNTSVILLE, AL 35811

STAMP



STUDIO 2H
1721 4TH AVENUE NORTH,
SUITE 101
BIRMINGHAM, AL 35203
OFFICE: 205-264-9988
FAX: 205-264-9992
STUDIO 2H DESIGN, LLC
STUDIO2HD.COM

NOT FOR CONSTRUCTION

RELEASED FOR CONSTRUCTION

DATE: 03/10/2020

DRAWN BY: CBH


















REVIEWED BY: CBH

REUSE OF DOCUMENTS

THIS DOCUMENT, THE IDEAS
AND DESIGNS INCORPORATED
HEREIN, IS AN INSTRUMENT OF
STUDIO 2H DESIGN, LLC AND MUST
NOT BE USED IN WHOLE OR IN PART,
FOR ANY OTHER PROJECT WITHOUT
THE WRITTEN AUTHORIZATION OF
STUDIO 2H DESIGN, LLC
NOLANDA HATCHER & CREIG HOSKINS

REVISIONS		
Revision	Date	Description

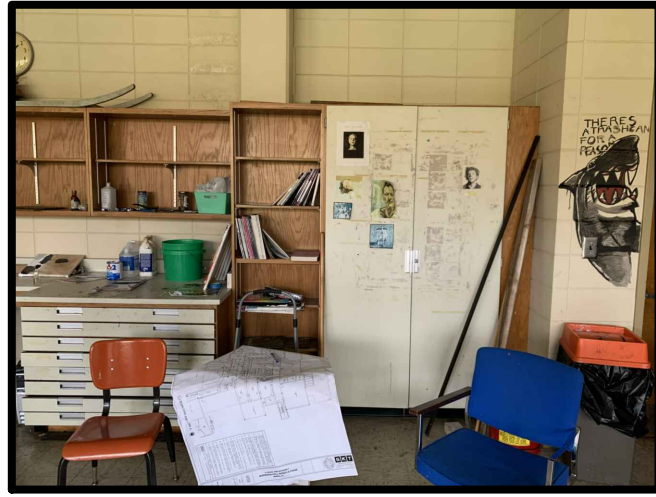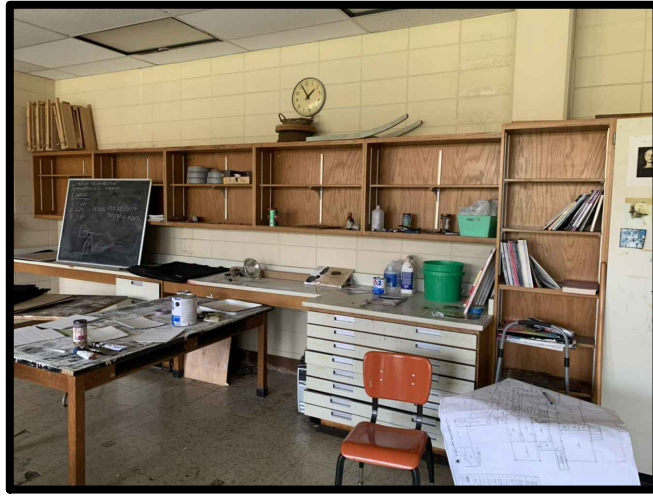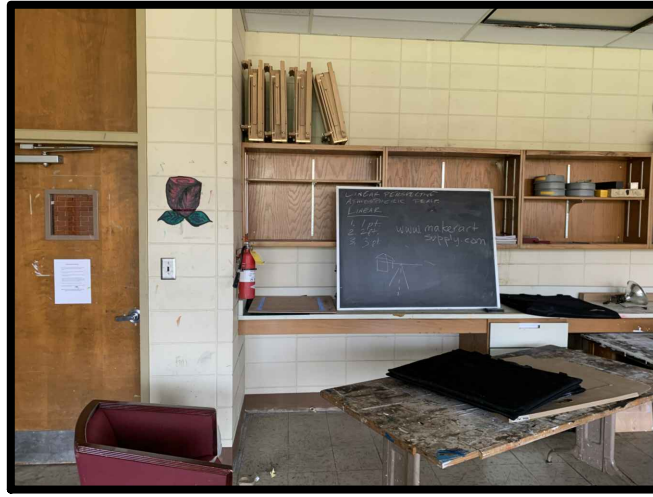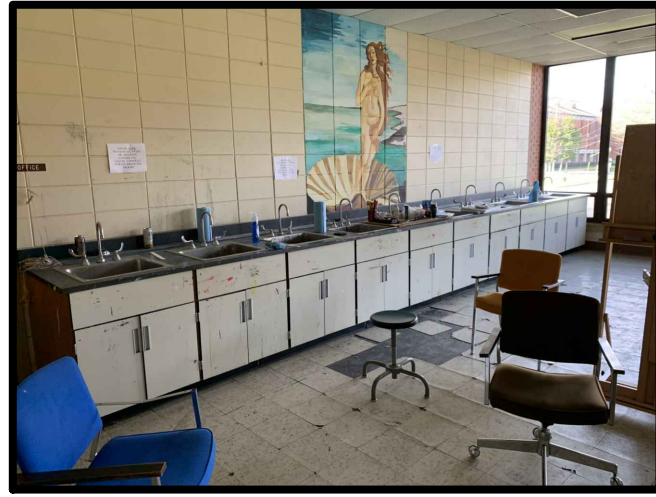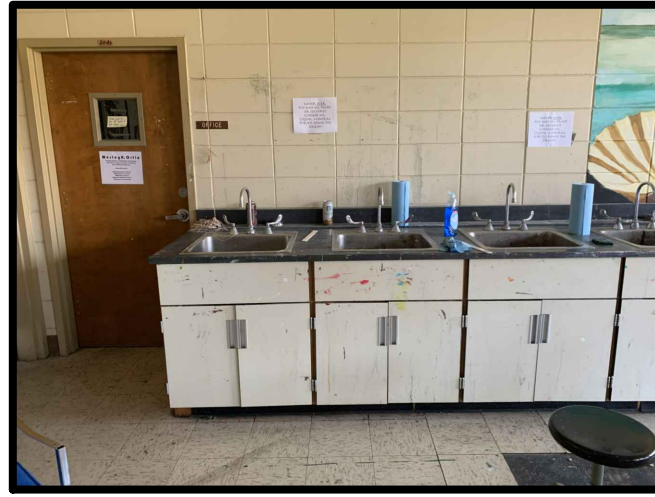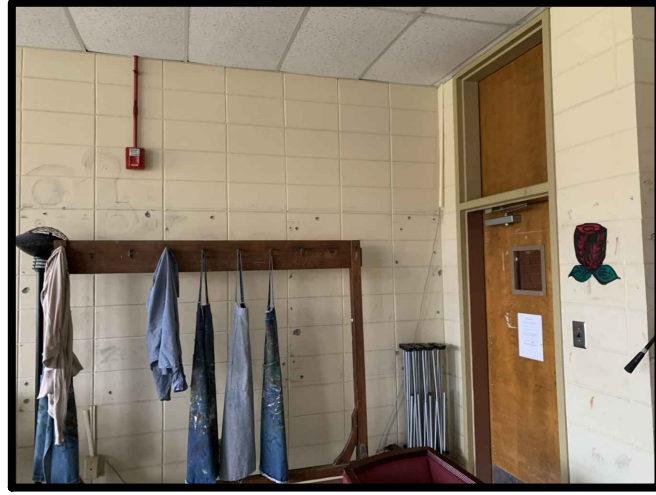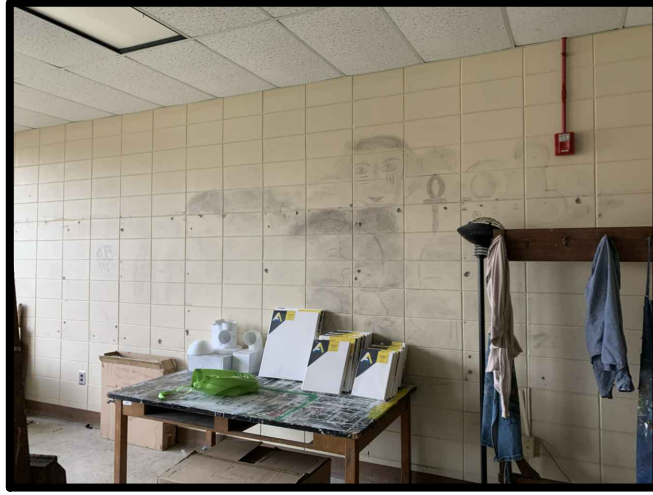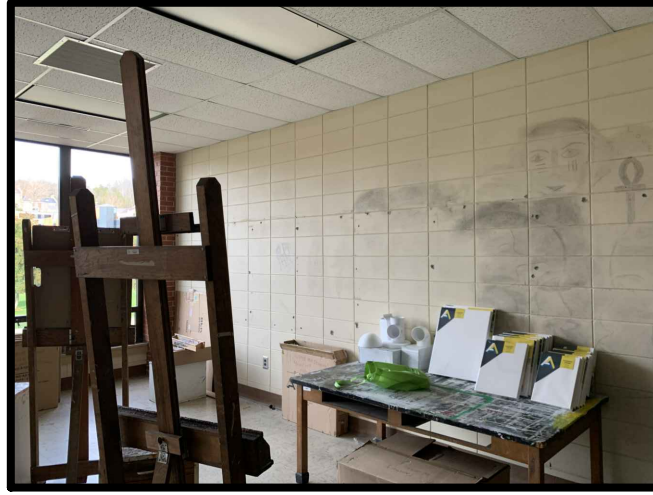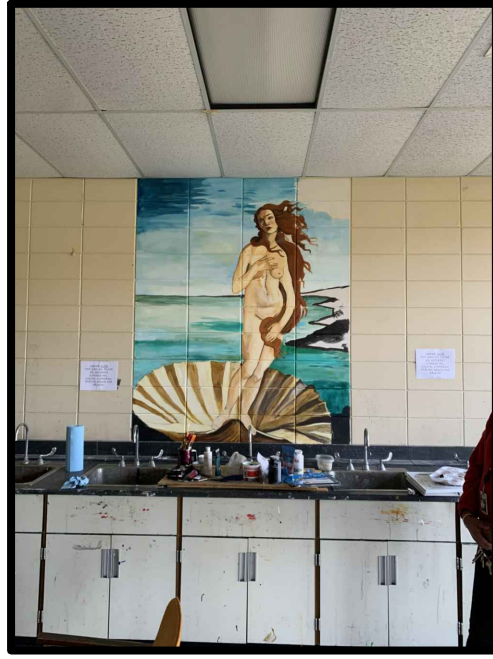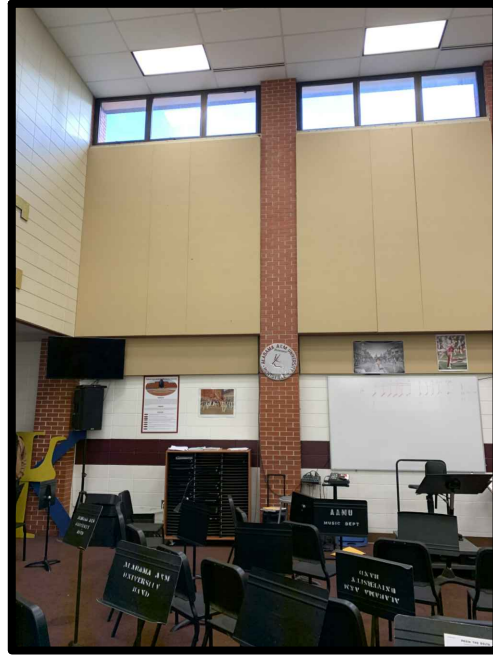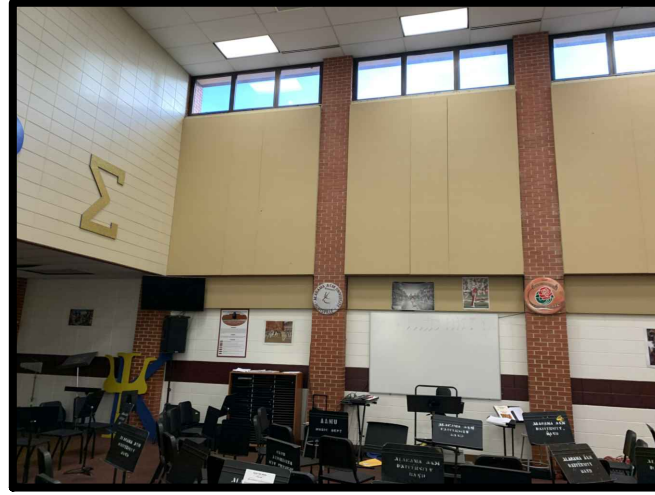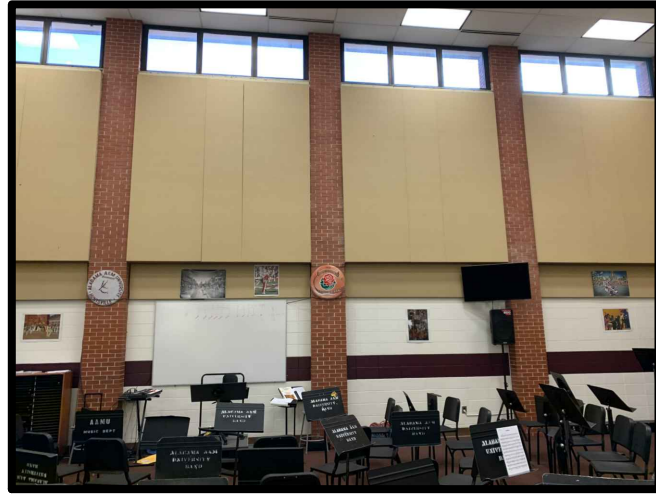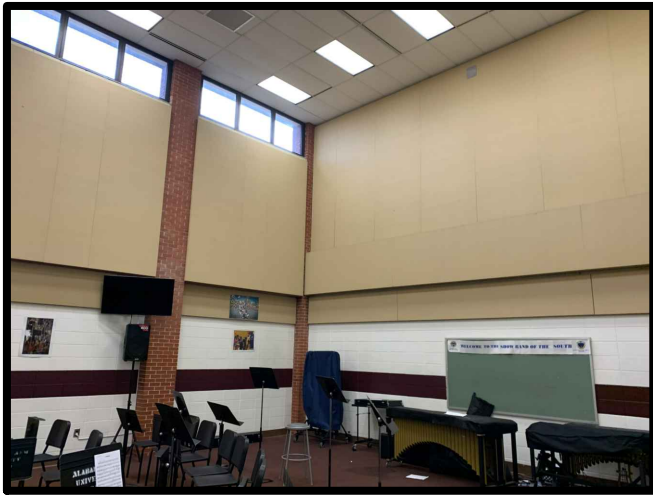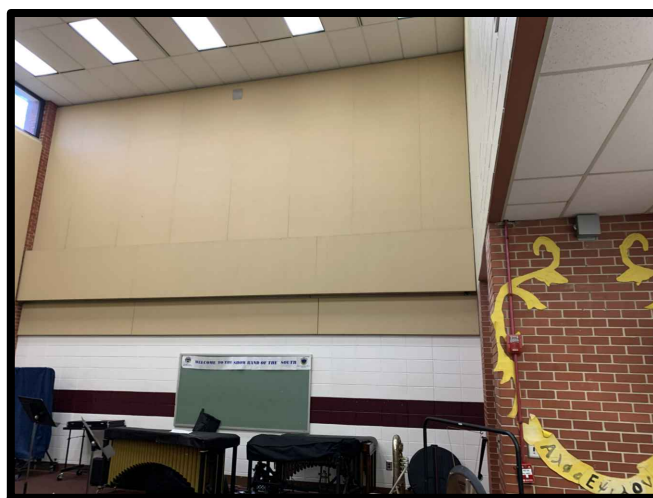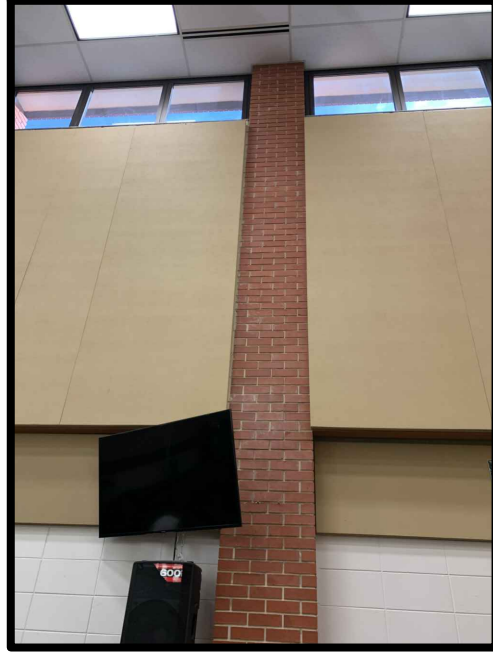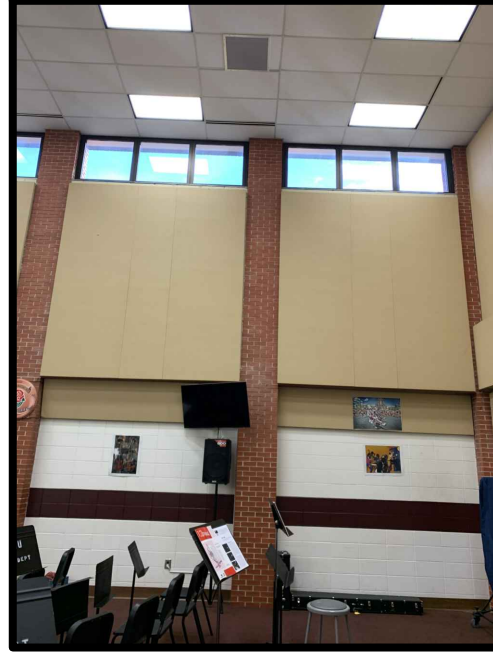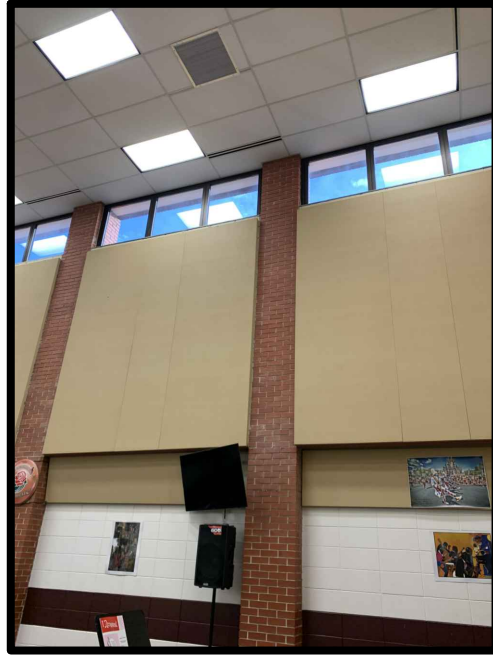SHEET TITLE
FIRST & SECOND
FLOOR PLAN
SOUTH
DRAWING NUMBER
A2.3 SOUTH
PROJECT NUMBER
202002

	1	2	3	4	5	6	7	8	9	10
H										
G		ROOM 204 CLEAN MILLWORK CABINETS		ROOM 204 1. CLEAN MILLWORK AND COUNTERTOP 2. REPLACE DAMAGED PLASTIC LAMINATE TOP AND NOSING, MATCH EXISTING.	ROOM 204 SOUTH ELEVATION	ROOM 204 WEST ELEVATION MILLWORK		ROOM 204 EAST ELEVATION SINK COUNTERTOP AND BASE CABINETS 1. REMOVE PAINT FROM BASE CABINETS AND COUNTERTOP 2. CLEAN STAINLESS STEEL SINKS		
F										
E										
D		1. REMOVE EXISTING ACOUSTICAL WALL PANEL AND REPLACE WITH NEW - SEE ALT NO. 3		1. REMOVE EXISTING ACOUSTICAL WALL PANEL AND REPLACE WITH NEW - SEE ALT NO. 3	1. REMOVE EXISTING ACOUSTICAL WALL PANEL AND REPLACE WITH NEW - SEE ALT NO. 3			1. PAINT ALL CMU WALLS THIS ROOM. REFER TO PAINT SCHEDULE FOR COLORS. PROTECT EXISTING LETTERS, PHOTOS AND ARTWORK REMAINING		
C										
B										
A										

PROJECT TITLE

ALABAMA A&M UNIVERSITY
FINE ARTS BUILDING
INTERIOR FINISHES
UPGRADES

4900 MERIDIAN STREET N
MORRISON BUILDING
HUNTSVILLE, AL 35811

STAMP

STATE OF ALABAMA
CREIG B. HOSKINS
No. 3753
BIRMINGHAM
REGISTERED ARCHITECT

STUDIO 2H DESIGN

1721 4TH AVENUE NORTH,
SUITE 101
BIRMINGHAM, AL 35203
OFFICE: 205-264-9988
FAX: 205-264-9992
WWW.STUDIO2HD.COM

NOT FOR CONSTRUCTION

RELEASED FOR CONSTRUCTION

DATE: 03/10/2020

DRAWN BY: CBH

REVIEWED BY: CBH

REUSE OF DOCUMENTS

THIS DOCUMENT, THE IDEAS
AND DESIGNS INCORPORATED
HEREIN, IS AN INSTRUMENT OF
STUDIO 2H DESIGN, LLC AND MUST
NOT BE USED IN WHOLE OR IN PART,
FOR ANY OTHER PROJECT WITHOUT
THE WRITTEN AUTHORIZATION OF
STUDIO 2H DESIGN, LLC
NOLANDA HATCHER & CREIG HOSKINS

REVISIONS

Revision	Date	Description

SHEET TITLE

PHOTOS

DRAWING NUMBER

A4.1

PROJECT NUMBER

202002